


serie 1200

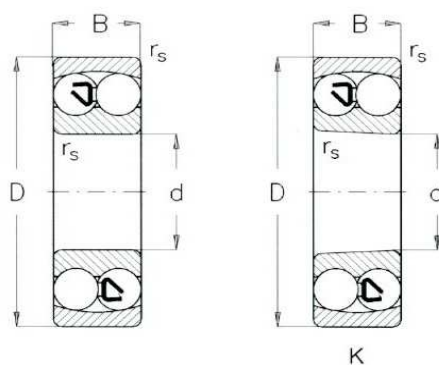

Bearing Number			Nominal Dimensions				Load Rating (kN)		Limiting Speed (RPM)		Weight of
Cylindrical	Tapered	Tapered	(mm)				Dynamic	Static	Grease	Oil	Bearing
Bore	Bore	Bore with Adapter	d	D	B	r	C	Co	Lube	Lube	kg
1200	1200K	1200 K+H	10	30	9	0.6	5.50	1.20	23000	28000	0.034
1201	1201K	1201 K+H	12	32	10	0.6	5.60	1.25	21000	26000	0.040
1202	1202K	1202 K+H	15	35	11	0.6	7.45	1.75	18000	22000	0.049
1203	1203K	1203 K+H	17	40	12	0.6	7.90	2.00	16000	20000	0.073
1204	1204K	1204 K+H	20	47	14	1.0	9.90	2.60	14000	17000	0.120
1205	1205K	1205 K+H	25	52	15	1.0	12.10	3.30	12000	14000	0.141
1206	1206K	1206 K+H	30	62	16	1.0	15.60	4.65	9900	12000	0.220
1207	1207K	1207 K+H	35	72	17	1.1	15.80	5.10	8500	10000	0.323
1208	1208K	1208 K+H	40	80	18	1.1	19.20	6.50	7500	9200	0.417
1209	1209K	1209 K+H	45	85	19	1.1	21.80	7.35	7000	8500	0.465
1210	1210K	1210 K+H	50	90	20	1.1	22.70	8.10	6500	7900	0.525
1211	1211K	1211 K+H	55	100	21	1.5	26.80	10.00	5800	7100	0.705
1212	1212K	1212 K+H	60	110	22	1.5	30.20	11.50	5200	6400	0.900
1213	1213K	1213 K+H	65	120	23	1.5	31.00	12.50	4800	5800	1.150
1214	1214K	1214 K+H	70	125	24	1.5	34.60	13.80	4600	5700	1.260
1215	1215K	1215 K+H	75	130	25	1.5	38.80	15.70	4300	5300	1.360
1216	1216K	1216 K+H	80	140	26	2.0	39.80	17.00	4000	4900	1.670
1217	1217K	1217 K+H	85	150	28	2.0	49.20	20.80	3800	4600	2.070
1218	1218K	1218 K+H	90	160	30	2.0	56.80	23.40	3500	4300	2.520
1219	1219K	1219 K+H	95	170	32	2.1	57.00	24.30	3300	4000	3.100
1220	1220K	1220 K+H	100	180	34	2.1	69.00	29.70	3100	3800	3.700