


Serie 23200

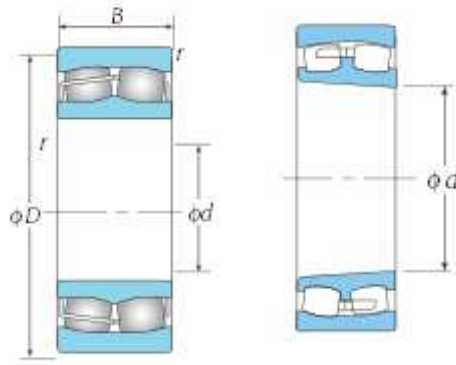

Bearing No.	Bearing No.	Nominal Dimensions				Load Rating (kN)		Limiting Speed (RPM)		Weight	Adapter
Cylindrical	Tapered	(mm)				Dynamic	Static	Grease	Oil		sleeve
bore	Bore	d	D	B	r min	C	Co	Lube	Lube	kg	
23218	23218K	90	160	52,4	2	317	459	2200	3000	4,700	H 2320
23220	23220K	100	180	60,3	2,1	415	599	2100	2800	6,680	H 2320
23222	23222K	110	200	69,8	2,1	525	786	1900	2500	9,570	H 2322
23224	23224K	120	215	76	2,1	583	894	1700	2300	11,800	H 2324
23226	23226K	130	230	80	3,0	668	1030	1600	2100	14,000	H 2326
23228	23228K	140	250	88	3,0	787	1230	1500	1900	18,400	H 2328
23230	23230K	150	270	96	3,0	924	1470	1300	1800	23,800	H 2330
23232	23232K	160	290	104	3,0	1030	1650	1200	1600	30,100	H 2332
23234	23234K	170	310	110	4	1150	1870	1100	1500	36,500	H 2334
23236	23236K	180	320	112	4	1190	1980	1100	1400	38,600	H 2336
23238	23238K	190	340	120	4	1410	2210	1000	1300	46,000	H 2338
23240	23240K	200	360	128	4	1550	2610	940	1300	56,400	H 2340
23244	23244K	220	400	144	4	1880	3200	830	1100	79,200	H 2344
23248	23248K	240	440	160	4	2340	3990	730	970	107,000	H 2348
23252	23252K	260	480	174	5	2750	4640	640	860	140,000	H 2352
23256	23256K	280	500	176	5	2690	4910	610	820	149,000	H 2356
23260	23260K	300	540	192	5	3430	5910	540	720	192,000	H 2360
23264	23264K	320	580	208	5	3630	6550	500	670	249,000	H 2364
23268	23268K	340	620	224	6	4090	7560	450	600	306,000	H 2368
23272	23272K	360	650	232	6	4960	9050	410	550	328,000	H 2372
23280	23280K	400	720	256	6	5210	9850	350	470	468,000	H 2380