


serie 1300

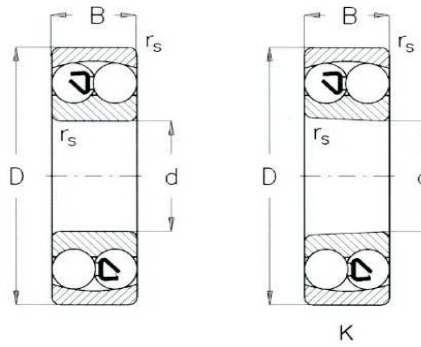

Bearing Number			Nominal Dimensions				Load Rating (kN)		Limiting Speed (RPM)		Weight of
Cylindrical	Tapered	Tapered	(mm)				Dynamic	Static	Grease	Oil	Bearing
Bore	Bore	Bore with Adapter	d	D	B	r	C	Co	Lube	Lube	kg
1300	1300K	1300K+H	10	35	11	0,6	7,25	1,6	20000	24000	0,058
1301	1301K	1301K+H	12	37	12	1	9,4	2,15	18000	22000	0,067
1302	1302K	1302K+H	15	42	13	1	9,55	2,3	16000	20000	0,094
1303	1303K	1303K+H	17	47	14	1	12,5	3,2	14000	17000	0,13
1304	1304K	1304K+H	20	52	15	1,1	12,4	3,3	13000	15000	0,163
1305	1305K	1305K+H	25	62	17	1,1	18	5	9900	12000	0,257
1306	1306K	1306K+H	30	72	19	1,1	21,3	6,3	8700	11000	0,387
1307	1307K	1307K+H	35	80	21	1,5	25,1	7,85	7600	9300	0,51
1308	1308K	1308K+H	40	90	23	1,5	29,5	9,7	6900	8400	0,715
1309	1309K	1309K+H	45	100	25	1,5	38,1	12,7	6100	7500	0,957
1310	1310K	1310K+H	50	110	27	2	43,4	14,1	5600	6800	1,21
1311	1311K	1311K+H	55	120	29	2	51,3	17,9	5000	6200	1,58
1312	1312K	1312K+H	60	130	31	2,1	57,2	20,8	4500	5500	1,96
1313	1313K	1313K+H	65	140	33	2,1	61,7	22,9	4300	5200	2,45
1314	1314K	1314K+H	70	150	35	2,1	74	27,7	4000	4900	2,99
1315	1315K	1315K+H	75	160	37	2,1	78,9	29,9	4000	4900	3,56
1316	1316K	1316K+H	80	170	39	2,1	88,1	33,1	3500	4300	4,18
1317	1317K	1317K+H	85	180	41	3	97,3	37,8	3300	4000	4,98
1318	1318K	1318K+H	90	190	43	3	116	44,4	3100	3800	5,8
1319	1319K	1319K+H	95	200	45	3	132	50,8	2900	3600	6,69
1320	1320K	1320K+H	100	215	47	3	143	57,3	2800	3400	8,3
1321	1321K	1321K+H	105	225	49	3	149	61	2600	3200	10
1322	1322K	1322K+H	110	240	50	3	164	73	2400	3000	12