


serie 22300

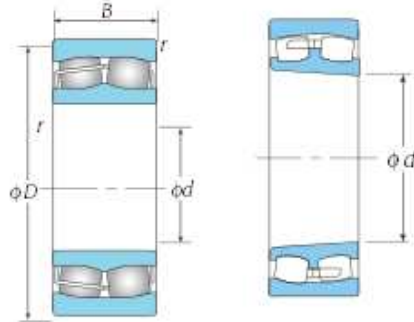

Bearing No.	Cylindrical bore	GOST	Bearing No.	GOST	Nominal Dimensions				Load Rating (kN)		Limiting Speed (RPM)		Weight kg	Adapter sleeve
					(mm)				Dynamic	Static	Grease	Oil		
					d	D	B	r min	C	Co	Lube	Lube		
22307	3607	22307K	113607	35	80	31	1,5	105	107	5100	6700	0,733	H 2307	
22308	3608	22308K	113608	40	90	33	1,5	125	134	4600	6100	1,020	H 2308	
22309	3609	22309K	113609	45	100	36	1,5	150	156	4100	5500	1,380	H 2309	
22310	3610	22310K	113610	50	110	40	2	184	203	3700	4900	1,790	H 2310	
22311	3611	22311K	113611	55	120	43	2	205	241	3300	4400	2,280	H 2311	
22312	3612	22312K	113612	60	130	46	2,1	239	279	3100	41000	2,850	H 2312	
22313	3613	22313K	113613	65	140	48	2,1	262	309	2800	3800	3,400	H 2313	
22314	3614	22314K	113614	70	150	51	2,1	311	364	2600	3500	4,110	H 2314	
22315	3615	22315K	113615	75	160	55	2,1	342	412	2500	3300	5,120	H 2315	
22316	3616	22316K	113616	80	170	58	2,1	392	480	2300	3100	6,100	H 2316	
22317	3617	22317K	113617	85	180	60	3	397	481	2200	2900	6,990	H 2317	
22318	3618	22318K	113618	90	190	64	3	458	556	2100	2800	8,300	H 2318	
22319	3619	22319K	113619	95	200	67	3	504	623	1900	2600	9,720	H 2319	
22320	3620	22320K	113620	100	215	73	3	579	713	1800	2400	12,200	H 2320	
22322	3622	22322K	113622	110	240	80	3	713	884	1600	2200	17,700	H 2322	
22324	3624	22324K	113624	120	260	86	3	812	1050	1500	2000	22,400	H 2324	
22326	3626	22326K	113626	130	280	93	4	948	1200	1400	1800	28,000	H 2326	
22328	3628	22328K	113628	140	300	102	4	1100	1410	1300	1700	35,500	H 2328	
22330	3630	22330K	113630	150	320	108	4	1230	1600	1200	1500	42,700	H 2330	
22332	3632	22332K	113632	160	340	114	4	1380	1790	1100	1400	51,000	H 2332	
22334	3634	22334K	113634	170	360	120	4	1460	1920	1000	1300	60,800	H 2334	
22336	3636	22336K	113636	180	380	126	4	1740	2360	920	1200	69,900	H 2336	
22338	3638	22338K	113638	190	400	132	5	1900	2610	880	1200	82,400	H 2338	
22340	3640	22340K	113640	200	420	138	5	2010	2750	830	1100	93,500	H 2340	
22344	3644	22344K	113644	220	460	145	5	2380	3380	720	960	122,000	H 2344	
22348	3648	22348K	113648	240	500	155	5	2610	4020	350	870	154,00	H 2348	
22352	3652	2235K	113652	260	540	165	6	2380	4380	590	780	192,00	H 2352	
22356	3656	22356K	113656	280	580	175	6	3150	4910	530	710	225,000	H 2356	
22360	3660	22360K	113660	300	620	185	7,5	3910	5430	470	360	289,000	H 2360	