


serie 21300

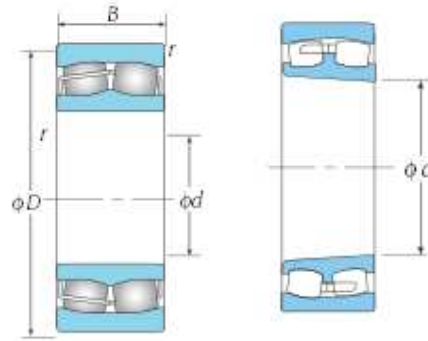

Cylindrical bore	Tapered Bore	Nominal Dimensions (mm)				Load Rating (kN)		Limiting Speed (RPM)		Weight kg	Adapter sleeve
		d	D	B	r min	Dynamic	Static	Grease Lube	Oil Lube		
						C	Co				
21306	21306K	30	72	19	1,1	51,5	49,4	5800	7800	0,420	H 306
21307	21307K	35	80	21	1,5	63,1	61,3	5000	6700	0,560	H 307
21308	21308K	40	90	23	1,5	82,8	82,2	4500	6100	0,780	H 308
21309	21309K	45	100	25	1,5	102	103	4000	5400	1,040	H 309
21310	21310K	50	110	27	2,0	121	124	3700	4900	1,330	H 310
21311	21311K	55	110	27	2,0	121	124	3700	4900	1,330	H 310
21312	21312K	60	130	31	2,1	173	204	3100	4100	1,930	H 312
21313	21313K	65	140	33	2,1	198	239	2800	3800	2,410	H 313
21314	21314K	70	150	35	2,1	312	286	2700	3500	2,950	H 314
21315	21315K	75	160	37	2,1	250	321	2500	3300	3,510	H 315
21316	21316K	80	170	39	2,1	275	339	2100	2800	4,140	H 316
21317	21317K	85	180	41	3,0	304	387	2200	2900	4,910	H 317
21318	21318K	90	190	43	3,0	347	443	2100	2800	5,710	H 318
21319	21319K	95	200	45	3,0	373	480	1900	2600	7,050	H 319
21320	21320K	100	215	47	3,0	414	528	1800	2400	8,670	H 320