
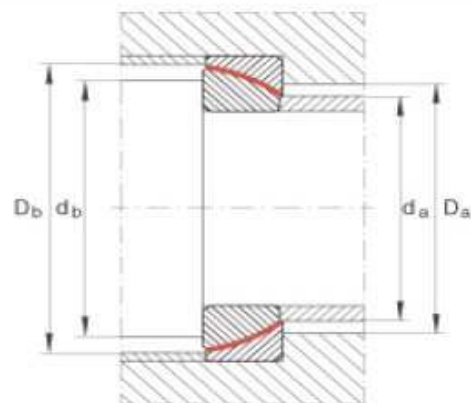


GE .. SW  
serie

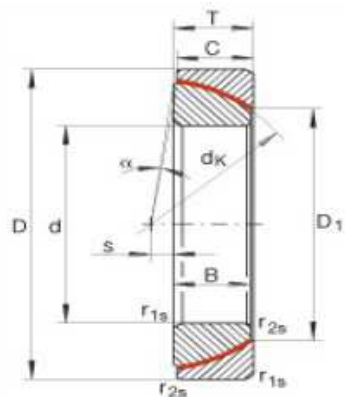

Product No.	Dimensions															Load rating (kN)		Weight kg
	d	D	T	B	C	D1	Da min	Db min	da max	db max	dK	r15 min	r25 min	s	α	Dynamic	Static	
GE25SW	25	47	15	14	14,0	31,4	34,0	43,0	30,1	39,5	42,5	0,6	0,2	1,0	2,7°	143,0	239,0	0,13
GE28SW	28	52	16	15	15,0	35,7	40,0	47,5	34,4	42,0	47,0	1,0	0,3	1,0	2,4°	172,0	287,0	0,18
GE30SW	30	55	17	16	16,0	36,1	40,5	50,5	34,6	45,0	50,0	1,0	0,3	2,0	2,3°	193,0	323,0	0,21
GE35SW	35	62	18	17	17,0	42,4	47,0	57,0	41,1	50,0	56,0	1,0	0,3	2,0	2,1°	235,0	392,0	0,27
GE40SW	40	68	19	18	18,0	46,8	52,0	61,0	45,5	54,0	60,0	1,0	0,3	1,5	1,9°	272,0	453,0	0,33
GE45SW	45	75	20	19	19,0	52,9	58,0	67,0	51,7	60,0	66,0	1,0	0,3	1,5	1,7°	319,0	532,0	0,41
GE50SW	50	80	20	19	19,0	59,1	65,0	75,0	57,9	67,0	74,0	1,0	0,3	4,0	1,6°	354,0	590,0	0,45
GE55SW	55	90	23	22	22,0	62,0	70,0	81,0	60,7	71,0	80,0	1,5	0,6	4,0	1,4°	447,0	745,0	0,67
GE60SW	60	95	23	22	22,0	68,1	76,0	87,0	66,9	77,0	86,0	1,5	0,6	5,0	1,3°	481,0	802,0	0,72
GE65SW	65	100	23	22	22,0	75,6	84,0	93,0	74,4	83,0	92,0	1,5	0,6	5,0	1,3°	520,0	864,0	0,77
GE70SW	70	110	25	24	24,0	82,2	90,0	104,0	80,9	92,0	102	1,5	0,6	7,0	1,1°	626,0	1040,0	1,00
GE80SW	80	125	29	27	27,0	90,5	99,0	117,0	88,0	104	115	1,5	0,6	10	2°	733,0	1220,0	1,50
GE90SW	90	140	32	30	30,0	103,3	112	132	100,8	118	130	2,0	0,6	11	1,8°	939,0	1560,0	2,10
GE100SW	100	150	32	30	30,0	114,3	123	142	112,0	128	140	2,0	0,6	12	1,7°	1010,0	1690,0	2,30
GE110SW	110	170	38	36	36,0	125,8	135	162	123,2	146	160	2,5	0,6	15	1,5°	1400,0	2340,0	3,70
GE120SW	120	180	38	36	36,0	135,4	145	172	132,9	155	170	2,5	0,6	17	1,4°	1490,0	2490,0	3,90
GE130SW	130	200	45	42	42,0	148,0	158	192	143,9	174	190	2,5	0,6	20	1,9°	1860,0	3110,0	6,10
GE140SW	140	210	45	42	42,0	160,6	171	202	156,9	184	200	2,5	0,6	20	1,8°	1990,0	3310,0	6,40
GE150SW	150	225	48	45	45,0	170,9	184	216	167,1	194	213	3,0	1,0	21	1,7°	2290,0	3820,0	7,80
GE160SW	160	240	51	48	48,0	181,4	195	228	177,7	206	225	3,0	1,0	21	1,6°	2610,0	4360,0	9,50
GE170SW	170	260	57	54	54,0	194,3	208	253	190,4	228	250	3,0	1,0	27	1,4°	3260,0	5440,0	13,00
GE180SW	180	280	64	61	61,0	205,5	220	263	201,7	240	260	3,0	1,0	21	1,3°	3950,0	6590,0	17,40
GE190SW	190	290	64	61	61,0	211,8	226	278	207,9	252	275	3,0	1,0	29	1,3°	4110,0	6850,0	18,20
GE200SW	200	310	70	66	66,0	229,2	244	293	224,1	268	290	3,0	1,0	26	1,6°	4640,0	7740,0	23,10

DIN ISO 12 240-2

[www.ebeco.cz](http://www.ebeco.cz)

ebeco cz, s.r.o.