


serie 23000

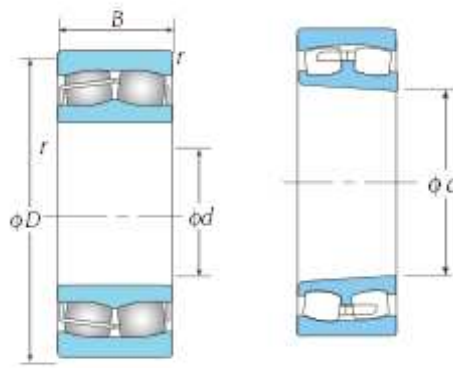

Bearing No.	Bearing No.	Nominal Dimensions				Load Rating (kN)		Limiting Speed (RPM)		Weight	Adapter
Cylindrical	Tapered	(mm)				Dynamic	Static	Grease	Oil		sleeve
bore	Bore	d	D	B	r min	C	Co	Lube	Lube	kg	
23022	23022K	110	170	45	2	286	478	2100	2800	3,870	H 3022
23024	23024K	120	180	46	2	229	517	1900	2600	4,220	H 3024
23026	23026K	130	200	52	2	377	654	1700	2300	5,990	H 3026
23028	23028K	140	210	53	2	428	737	1600	2200	6,670	H 3028
23030	23030K	150	225	56	2,1	467	812	1500	2000	8,010	H 3030
23032	23032K	160	240	60	2,1	539	944	1400	1900	9,900	H 3032
23034	23034K	170	260	67	2,1	609	1110	1300	1700	13,000	H 3034
23036	23036K	180	280	74	2,1	710	1290	1200	1600	17,100	H 3036
23038	23038K	190	290	75	2,1	736	1370	11000	1500	18,200	H 3038
23040	23040K	200	310	82	2,1	890	1670	1000	1400	23,400	H 3040
23044	23044K	220	340	90	3	984	1890	940	1300	30,600	H 3044
23048	23048K	240	360	92	3	1100	2170	860	1100	33,800	H 3048
23052	23052K	260	400	104	4	1330	2570	760	100	49,300	H 3052
23056	23056K	280	420	106	4	1430	2860	710	950	52,900	H 3056
23060	23060K	300	460	118	4	1750	3480	630	840	73,700	H 3060
23064	23064K	320	480	121	4	1830	3740	590	790	78,800	H 3064
23068	23068K	340	520	133	5	2130	4330	530	710	105,000	H 3068
23072	23072K	360	540	134	5	2280	4800	500	660	115,000	H 3072
23080	23080K	400	600	148	5	2710	4790	420	560	155,000	H 3080