


serie NK

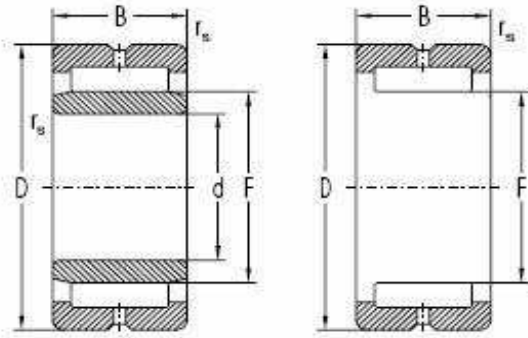

Bearing Number	Dimensions (mm)				Load Rating (kN)		Limiting speed		Weight kg
	d	Fw	D	B	Dynamic	Static	Lubrication		
					C	Co	Grease	Oil	
NK 5/10	5	5	10	10	2,29	2	36000	52000	0,003
NK 5/12	5	5	10	12	2,92	2,7	36000	52000	0,005
NK 6/10	6	6	12	10	2,55	2,36	32000	45000	0,005
NK 6/12	6	6	12	12	3,3	3,2	32000	45000	0,006
NK 7/10	7	7	14	10	2,81	2,75	3000	43000	0,0070
NK 7/12	7	7	14	12	3,58	3,75	30000	43000	0,0080
NK 8/12	8	8	15	12	3,8	4,25	28000	40000	0,0090
NK 8/16	8	8	15	16	5,01	5,85	28000	40000	0,0120
NK 9/12	9	9	16	12	4,4	5,2	24000	36000	0,0100
NK 9/16	9	9	16	16	5,72	7,2	24000	36000	0,0130
NK 10/12	10	10	17	12	4,57	5,7	22000	3400	0,0120
NK 10/16	10	10	17	16	5,94	8	22000	34000	0,0130
NK 12/12	12	12	19	12	6,71	8,15	19000	30000	0,1400
NK 12/16	12	12	19	16	9,13	12	19000	30000	0,0160
NK 14/16	14	14	22	16	10,2	12,5	17000	26000	0,0210
NK 14/20	14	14	22	20	12,8	16,6	17000	26000	0,0260
NK 15/16	15	15	23	16	11	14	16000	24000	0,0220
NK 15/20	15	15	23	20	13,8	18	16000	24000	0,0270
NK 16/16	16	16	24	16	11,7	15,3	16000	24000	0,0220
NK 16/20	16	16	24	20	14,5	20,0	16000	24000	0,0320
NK 17/16	17	17	25	16	12,1	16,6	15000	22000	0,0290
NK 17/20	17	17	25	20	15,1	22,0	15000	22000	0,0300
NK 18/16	18	18	26	16	12,8	17,6	15000	22000	0,0250
NK 18/20	18	18	26	20	16,1	24	15000	22000	0,0320
NK 19/16	19	19	27	16	13,4	19	14000	20000	0,0260
NK 19/20	19	19	27	20	16,5	25,5	14000	20000	0,0320
NK 20/16	20	20	28	16	13,2	19,3	13000	20000	0,0270
NK 20/20	20	20	28	20	16,5	25,5	13000	19000	0,0340
NK 21/16	21	21	29	16	13,8	20,4	13000	19000	0,0280
NK 21/20	21	21	29	20	17,2	27,0	13000	19000	0,0350
NK 22/16	22	22	30	16	14,2	21,6	12000	18000	0,0300
NK 22/20	22	22	30	20	17,9	29,0	12000	18000	0,0370
NK 24/16	24	24	32	16	15,4	24,5	10000	16000	0,0320
NK 24/20	24	24	32	20	19,0	32,5	10000	16000	0,0400
NK 25/16	25	25	33	16	15,1	24,5	10000	16000	0,0330
NK 25/20	25	25	33	20	19,0	32,5	10000	16000	0,0420
NK 26/16	26	26	34	16	15,7	26,0	9500	15000	0,0340
NK 26/20	26	26	34	20	19,4	34,5	9500	15000	0,0420
NK 28/20	28	28	37	20	22,0	36,5	9000	14000	0,0520
NK 28/30	28	28	37	30	31,9	60	9000	14000	0,0820
NK 29/20	29	29	38	20	22,0	36,5	9000	14000	0,0540
NK 29/30	29	29	38	30	31,9	60	9000	14000	0,0840
NK 30/20	30	30	40	20	22,9	38	8500	13000	0,0650
NK 30/30	30	30	40	30	33,0	63,0	8500	13000	0,0980
NK 32/20	32	32	42	20	23,3	40,5	8000	12000	0,0680
NK 32/30	32	32	42	30	34,1	65,5	8000	12000	0,1000
NK 35/20	35	35	45	20	24,6	45,0	7500	11000	0,0740
NK 35/30	35	35	45	30	35,8	72,0	7500	11000	0,1100
NK 37/20	37	37	47	20	25,1	46,5	7500	11000	0,0770
NK 37/30	37	37	47	30	36,9	77	7500	11000	0,1100
NK 38/20	38	38	48	20	25,5	49	7500	11000	0,0800
NK 40/20	40	40	50	20	26,4	51	7000	10000	0,0830
NK 40/30	40	40	50	30	38,0	83	7000	1000	0,1300
NK 42/20	42	42	52	20	27,0	53	6700	8500	0,0860
NK 42/30	42	42	52	30	39,1	87	6700	9500	0,1300
NK 43/20	43	43	53	20	27,5	55	6700	9500	0,0860
NK 43/30	43	43	53	30	40,2	90	6700	9500	0,1300
NK 45/20	45	45	55	20	27,5	57	6300	9000	0,0920
NK 45/30	45	45	55	30	40,2	93	6300	9000	0,1400