


serie 23100

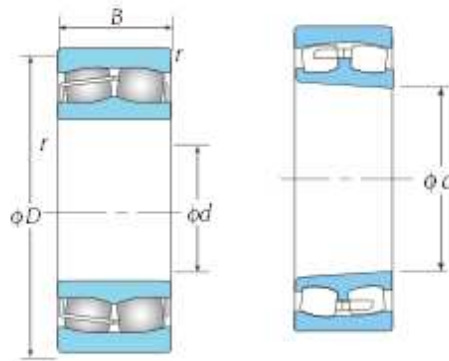

Bearing No.	Bearing No.	Nominal Dimensions				Load Rating (kN)		Limiting Speed (RPM)		Weight	Adapter
Cylindrical	Tapered	(mm)				Dynamic	Static	Grease	Oil		sleeve
bore	Bore	d	D	B	r min	C	Co	Lube	Lube	kg	
23120	23120K	100	165	52	2	297	493	2200	3000	4,440	H 3120
23122	23122K	110	180	56	2	346	591	2000	2700	5,580	H 3122
23124	23124K	120	200	62	2	447	760	1800	2400	8,090	H 3124
23126	23126K	130	210	64	2	506	826	1700	2200	8,820	H 3126
23128	23128K	140	225	68	2,1	561	934	1500	2100	10,500	H 3128
23130	23130K	150	250	80	2,1	689	1230	1400	1900	15,900	H 3130
23132	23132K	160	270	86	2,1	796	1380	1300	1700	19,900	H 3132
23134	23134K	170	280	88	2,1	888	1490	1200	1600	21,700	H 3134
23136	23136K	180	300	96	3	1000	1800	1100	1500	27,500	H 3136
23138	23138K	190	320	104	3	1090	2000	1000	1400	34,400	H 3138
23140	23140K	200	340	112	3	1240	2250	980	1300	42,400	H 3140
23144	23144K	220	370	120	4	1440	2700	880	1200	53,200	H 3144
23148	23148K	240	400	128	4	1630	3080	790	1100	65,600	H 3148
23152	23152K	260	440	144	4	2100	3860	710	940	90,800	H 3152
23156	23156K	280	460	146	5	2140	4280	660	880	96,900	H 3156
23160	23160K	300	500	160	5	2490	4850	590	790	128,000	H 3160
23164	23164K	320	540	176	5	2900	5700	530	700	171,000	H 3164
23168	23138K	340	580	190	5	3280	6430	480	640	216,000	H 3168
23172	23172K	360	600	192	5	3770	7440	440	590	228,000	H 3172
23180	23180K	400	650	200	6	4310	8100	390	520	255,000	H 3180