


serie 21300

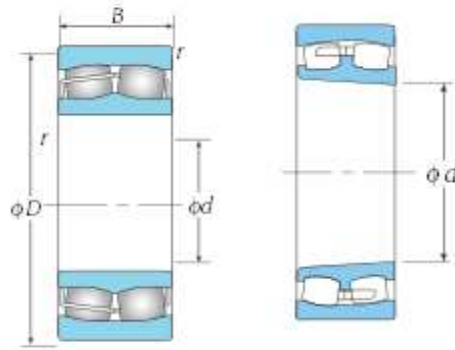

| Bearing Number | | Nominal Dimensions | | | | Load Rating (kN) | | Limiting Speed (RPM) | | Weight of | Adapter |
|----------------|---------|--------------------|-----|----|-------|------------------|--------|----------------------|------|-----------|---------|
| Cylindrical | Tapered | (mm) | | | | Dynamic | Static | Grease | Oil | Bearing | sleeve |
| Bore | Bore | d | D | B | r min | C | Co | Lube | Lube | kg | |
| 21306 | 21306K | 30 | 72 | 19 | 1,1 | 51,5 | 49,4 | 5800 | 7800 | 0,420 | H 306 |
| 21307 | 21307K | 35 | 80 | 21 | 1,5 | 63,1 | 61,3 | 5000 | 6700 | 0,560 | H 307 |
| 21308 | 21308K | 40 | 90 | 23 | 1,5 | 82,8 | 82,2 | 4500 | 6100 | 0,780 | H 308 |
| 21309 | 21309K | 45 | 100 | 25 | 1,5 | 102 | 103 | 4000 | 5400 | 1,040 | H 309 |
| 21310 | 21310K | 50 | 110 | 27 | 2,0 | 121 | 124 | 3700 | 4900 | 1,330 | H 310 |
| 21311 | 21311K | 55 | 110 | 27 | 2,0 | 121 | 124 | 3700 | 4900 | 1,330 | H 310 |
| 21312 | 21312K | 60 | 130 | 31 | 2,1 | 173 | 204 | 3100 | 4100 | 1,930 | H 312 |
| 21313 | 21313K | 65 | 140 | 33 | 2,1 | 198 | 239 | 2800 | 3800 | 2,410 | H 313 |
| 21314 | 21314K | 70 | 150 | 35 | 2,1 | 312 | 286 | 2700 | 3500 | 2,950 | H 314 |
| 21315 | 21315K | 75 | 160 | 37 | 2,1 | 250 | 321 | 2500 | 3300 | 3,510 | H 315 |
| 21316 | 21316K | 80 | 170 | 39 | 2,1 | 275 | 339 | 2100 | 2800 | 4,140 | H 316 |
| 21317 | 21317K | 85 | 180 | 41 | 3,0 | 304 | 387 | 2200 | 2900 | 4,910 | H 317 |
| 21318 | 21318K | 90 | 190 | 43 | 3,0 | 347 | 443 | 2100 | 2800 | 5,710 | H 318 |
| 21319 | 21319K | 95 | 200 | 45 | 3,0 | 373 | 480 | 1900 | 2600 | 7,050 | H 319 |
| 21320 | 21320K | 100 | 215 | 47 | 3,0 | 414 | 528 | 1800 | 2400 | 8,670 | H 320 |