


serie
UCFL200

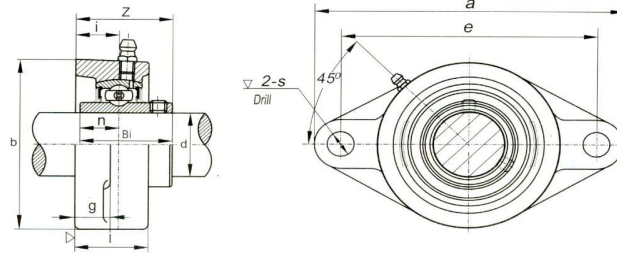

Bearing unit No.	Shaft Dia.	Dimension /mm/										Bolt used	Bearing No.:	Housing No.:	Weight kg
	d	a	e	i	g	l	S	b	Z	Bi	n	/mm/			
	/mm/														
UCFL 201	12	113,0	90	15	11	25,5	12	60	33,3	31,0	12,7	M10	UC 201	FL 201	0,49
UCFL 202	15	113,0	90	15	11	25,5	12	60	33,3	31,0	12,7	M10	UC202	FL 202	0,49
UCFL 203	17	113,0	90	15	11	25,5	12	60	33,3	31,0	12,7	M10	UC 203	FL 203	0,49
UCFL 204	20	113,0	90	15	11	25,5	12	60	33,3	31,0	12,7	M10	UC 204	FL 204	0,49
UCFL 205	25	130,0	99	16	13	27	16	68	35,7	34,0	14,3	M14	UC 204	FL 205	0,63
UCFL 206	30	148,0	117	18	13	31	16	80	40,2	38,1	15,9	M14	UC 205	FL 206	0,94
UCFL 207	35	161,0	130	19	14	34	16	90	44,4	42,9	17,5	M14	UC 206	FL 207	1,20
UCFL 208	40	175,0	144	21	14	36	16	100	51,2	49,2	19,0	M14	UC 207	FL 208	1,60
UCFL 209	45	188,0	148	22	15	38	19	108	52,2	49,2	19,0	M16	UC 208	FL 209	1,90
UCFL 210	50	197,0	157	22	15	40	19	115	54,6	51,6	19,0	M16	UC 209	FL 210	2,20
UCFL 211	55	224,0	184	25	18	43	19	130	58,4	55,6	22,2	M16	UC 210	FL 211	3,20
UCFL 212	60	250,0	202	29	18	48	23	140	68,7	65,1	25,4	M20	UC 211	FL 212	4,10
UCFL 213	65	258,0	210	30	20	50	23	155	69,7	65,1	25,4	M20	UC 212	FL 213	5,10
UCFL 214	70	265,0	216	31	20	54	23	160	75,4	74,6	30,2	M20	UC 213	FL 214	5,90
UCFL 215	75	275,0	225	35	20	57	23	165	79,5	77,8	33,3	M20	UC 214	FL 215	6,40
UCFL 216	80	290,0	233	35	20	59	25	180	84,3	82,6	33,3	M22	UC 215	FL 216	7,90
UCFL 217	85	305,0	248	36	22	63	25	190	87,6	85,7	34,1	M22	UC 215	FL 217	9,60
UCFL 218	90	320,0	265	42	23	70	25	205	98,3	96,0	39,7	M22	UC 216	FL 218	12,10