


serie  
UCFL300

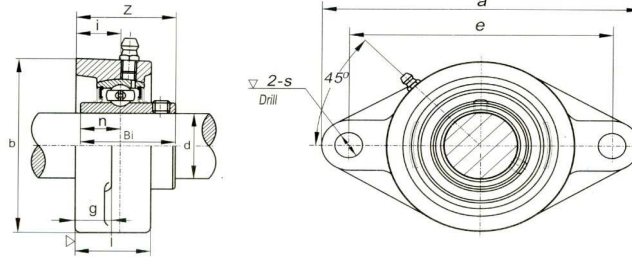

Bearing unit No.	Shaft Dia.	Dimension /mm/										Bolt used	Bearing No.:	Housing No.:	Weight kg
	d	a	e	i	g	l	S	b	Z	Bi	n				
	/mm/	/mm/	/mm/	/mm/	/mm/	/mm/	/mm/	/mm/	/mm/	/mm/	/mm/				
UCFL 305	25	150	113	16	13	29	19	80	39	38	15,0	M16	UC 305	FL 305	1,1
UCFL 306	30	180	134	18	15	32	23	90	44	43	17,0	M20	UC 306	FL 306	1,5
UCFL 307	35	185	141	20	16	36	23	100	49	48	19,0	M20	UC 307	FL 307	1,8
UCFL 308	40	200	158	23	17	40	23	112	56	52	19,0	M20	UC 308	FL 308	2,4
UCFL 309	45	230	177	25	18	44	25	125	60	57	22,0	M22	UC 309	FL 309	3,4
UCFL 310	50	240	187	28	19	48	25	140	67	61	22,0	M22	UC 310	FL 310	4,3
UCFL 311	55	250	198	30	20	52	25	150	71	66	25,0	M22	UC 311	FL 311	5,2
UCFL 312	60	270	212	33	22	56	31	160	78	71	26,0	M27	UC 312	FL 312	6,3
UCFL 313	65	295	240	33	25	58	31	175	78	75	30,0	M27	UC 313	FL 313	7,9
UCFL 314	70	315	250	36	28	61	35	185	81	78	33,0	M30	UC 314	FL 314	9,3
UCFL 315	75	320	260	39	30	66	35	195	89	82	32,0	M30	UC 315	FL 315	10,6
UCFL 316	80	355	285	38	32	68	38	210	90	86	34,0	M33	UC 316	FL 316	13,5
UCFL 317	85	370	300	44	32	74	38	220	100	96	40,0	M33	UC 317	FL 317	15,2
UCFL 318	90	385	315	44	36	76	38	235	100	96	40,0	M33	UC 318	FL 318	18,0
UCFL 319	95	405	330	59	40	94	41	250	121	103	41,0	M36	UC 319	FL 319	22,7
UCFL 320	100	440	360	59	40	94	44	270	125	108	42,0	M39	UC 320	FL 320	27,2
UCFL 322	110	470	390	60	42	96	44	300	131	117	46,0	M39	UC 322	FL 322	34,2
UCFL 324	120	520	430	65	48	110	47	330	140	126	51,0	M42	UC 324	FL 324	48,1
UCFL 326	130	550	460	65	50	115	47	360	146	135	54,0	M42	UC 326	FL 326	59,5
UCFL 328	140	600	500	75	60	125	51	400	161	145	59,0	M45	UC 328	FL 328	73,5